

317[®]

ISO 9001

Steam Assortment & Control Valve

ASR

ANAB



TN311

T-ONE-S (MFG) TRADING INC.

Cat. Sep06

**THERMODYNAMIC ST.ST.316
STEAM TRAP PN40 ANSI 600 LBS.**
BODY: INVESTMENT CF8M
SCREWED END TO BS21, ANSI B2.1
SIZE: 1/2"~1"

MODEL: UN-317



**THERMODYNAMIC ST.ST.316
STEAM TRAP PN40 ANSI 600 LBS.**
BODY: INVESTMENT CF8M
SCREWED END TO BS21, ANSI B2.1
SIZE: 1/2"~1"

MODEL: ST-02



**THERMODYNAMIC ST.ST.316
STEAM TRAP PN40 ANSI 600 LBS.**
BODY: INVESTMENT CF8M
SCREWED END TO BS21, ANSI B2.1
SIZE: 1/2"~1"

MODEL: ST-03




CAST IRON STEAM TRAP CLASS 16K
SCREWED END TO BS21, ANSI B2.1 OR
DIN-259. BODY: FC20
SIZE: 1/2"~1"

MODEL: ST-8LS




CAST IRON STEAM TRAP CLASS 16K
SCREWED END TO BS21, ANSI B2.1 OR
DIN-259. BODY: FC20
SIZE: 1/2"~2"

MODEL: ST-T3A




CAST IRON STEAM TRAP CLASS 16K
SCREWED END TO BS21, ANSI B2.1 OR
DIN-259. BODY: FC20
WITH BLOW-OFF.
SIZE: 1/2"~2"

MODEL: ST-T3B



CAST IRON STEAM TRAP CLASS 16K
FLANGED END TO JIS 10K, ANSI 150,
DIN-PN16 OR PN10. DRILLED.
BODY: FC20
SIZE: 1/2"~2"

MODEL: ST-T3F



CAST IRON STEAM TRAP CLASS 16K
SCREWED END TO BS21, ANSI B2.1 OR
DIN-259. BODY: FC20
SIZE: 1/2"~2"

MODEL: ST-T6A (MANUAL TYPE)



CAST IRON STEAM TRAP CLASS 16K
FLANGED END TO JIS 10K, ANSI 150,
DIN-PN16 OR PN10. DRILLED.
BODY: FC20
SIZE: 1/2"~2"


MODEL: ST-T6F (MANUAL TYPE)



CAST IRON Y-STRAINER CLASS 10K

SCREWED END TO BS21, ANSI B2.1
OR DIN-259. BODY: FC20
WITH S.S.304 SCREEN.
SIZE: 1/2"~3"

MODEL: YS-R3S



CAST IRON Y-STRAINER CLASS 10K

FLANGED END TO JIS 10K, ANSI 150 LBS
OR BS4504 STD PN16 OR PN10.
BODY: FC20
SIZE: 1-1/2"~12"

MODEL: YS-R3F



BRONZE Y-STRAINER CLASS 150

SCREWED END TO BS21, ANSI B2.1
BODY: BC1 OR BC6
SIZE: 1/2"~3"

MODEL: YS-BC6



BRONZE PRESSURE REDUCING VALVE CLASS 10K

SCREWED END TO BS21, ANSI B2.1
BODY: BC1 / BC6
SIZE: 1/2"~2"

MODEL: PR-B6S



CAST IRON PRESSURE REDUCING VALVE CLASS 10K

SCREWED END TO BS21, ANSI B2.1
OR DIN-259. BODY: FC20
SIZE: 1/2"~1"

MODEL: PR-3AS



CAST IRON PRESSURE REDUCING VALVE CLASS 10K

FLANGED END TO JIS 10K, ANSI 150,
DIN PN16 DRILLED. BODY: FC20
SIZE: 1/2"~6"

MODEL: PR-3AF



ST.ST.304 PRESSURE REDUCING VALVE CLASS 10K

SCREWED END TO BS21, ANSI B2.1
BODY: SUS304
SIZE: 1/2"~2"

MODEL: PR-304S



BRONZE STRAINER

SCREWED END TO BS21, ANSI B2.1
BODY: BC1 OR BC6
SIZE: 1/2"~1"

MODEL: ST-BC6



CAST IRON FLOAT VALVE

FLANGED END TO JIS 10K, ANSI 150.
DRILLED. BODY: FC20
SIZE: 1-1/2"~8"
ALT. BODY: SUS 304 / SUS 316.
(FT304-551 / FT316-551)

MODEL: FT-551



TESTER

CAST IRON SIGHT GLASS

DOUBLE WINDOW. SCREWED END TO BS21 OR ANSI B2.1
BODY: CAST IRON
SIZE: 1/2"~2"

MODEL: SK-B1




TESTER

CAST IRON SIGHT GLASS

DOUBLE WINDOW.
FLANGED END TO JIS 10K OR
ANSI 150 LBS. DRILLED. BODY: CAST IRON
SIZE: 1/2"~8"

MODEL: SK-B2

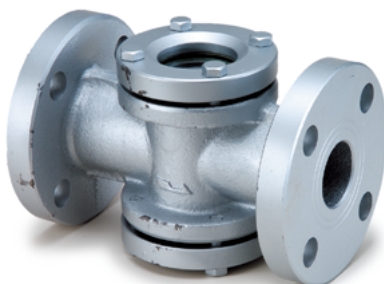

TESTER

CAST IRON MINI TYPE SIGHT GLASS

SCREWED END TO BS21 OR
ANSI B2.1 BODY: CAST IRON
SIZE: 1/2"~2"

MODEL: SK-T6



TESTER

CAST IRON SIGHT GLASS

TEFLON BALL INSIDE.
SCREWED END TO BS21 OR ANSI B2.1
BODY: CAST IRON
SIZE: 1/2"~2"

MODEL: SK-T8



TESTER

ST.ST.304/316 SIGHT GLASS

SCREWED END OR WELDED END.
BODY: SUS304 / SUS316
SIZE: 1/2"~2"

MODEL: SK-304T9 / SK-316T9



TESTER

ST.ST.304/316 SIGHT GLASS

FLANGED END TO JIS 10K OR
ANSI 150 LBS. DRILLED.
BODY: SUS304 / SUS316
SIZE: 1/2"~8"

MODEL: SK-304B2 / SK-316B2



CARBON STEEL SYPHON TUBE

O TYPE: WITH BOTH END BSPT 180°
U TYPE: WITH BOTH END BSPT 90°
SIZE: 1/4"~1/2"


MODEL: SPH-O-CS / SPH-U-CS



ST.ST.304 SYPHON TUBE

O TYPE: WITH BOTH END BSPT 180°
U TYPE: WITH BOTH END BSPT 90°
SIZE: 1/4"~1/2"

MODEL: SPH-O-304 / SPH-U-304

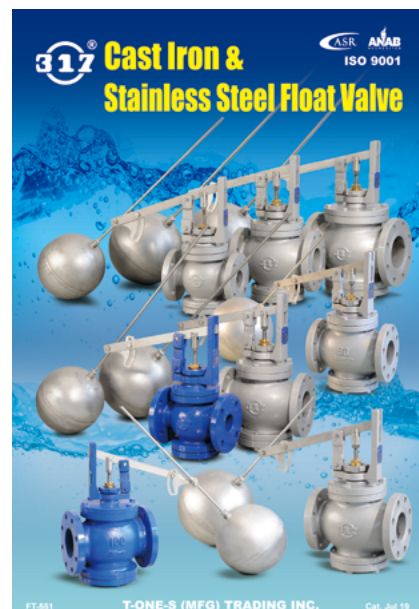

CAST IRON CONTROL VALVE

CYLINDER TYPE. FLANGED END
TO JIS 10K DRILLED.

BODY: FC25

SIZE: 3/4"~4"

MODEL: CV-CYD



ST.ST.304 CONTROL VALVE

CYLINDER TYPE. FLANGED END
TO JIS 10K DRILLED.

BODY: SCS13

SIZE: 3/4"~4"

MODEL: V4-CYD



DIAPHRAGM CONTROL VALVE

FLANGED END TO JIS 10K DRILLED.

BODY: FC25 / SCS13

SIZE: 1/2"~4"

ON-OFF TYPE

MODEL: CV-DIA / V4-DIA



DIAPHRAGM CONTROL VALVE

FLANGED END TO JIS 10K DRILLED.

BODY: FC25 / SCS13 SIZE: 1/2"~4"

OPTION: POSITIONER, LIMIT SWITCH,
AIR SET & LUBRICATOR

PROPORTION TYPE

MODEL: CV-MDL / V4-MDL

